

TRANSVERSE CONTRACTION JOINTS @ 10'-0" MIN., 12'-6" MAX. SPACING -CURB & GUTTER LONGITUDINAL SAWED OR— CONSTRUCTION JOINT (CONTRACTOR'S OPTION) -#6 TIE BARS @ 2.00' O.C. (TYP.) -#6 TIE BARS @ 2.00' O.C. (TYP.) ' P.C.C. ¢ CAPITOL AVENUE ----#6 TIE BARS ⊚ 2.00′ O.C. (TYP.) 18×1.25" DOWEL BARS @ 1.00' O.C. (TYP.) TRANSVERSE CONTRACTION JOINT-7" PCC -CURB & GUTTER TYPICAL PAVEMENT JOINT LAYOUT

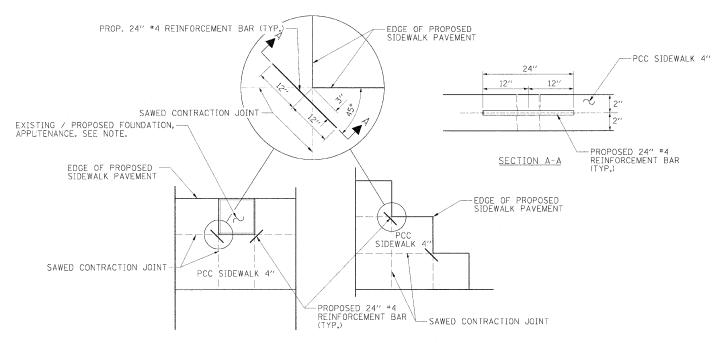

SIDEWALK REINFORCEMENT DETAIL

NOTE:
REINFORCEMENT BAR SHALL BE PLACED IN PROPOSED SIDEWALK
AT SIMILAR LOCATIONS ADJACENT TO EXISTING AND PROPOSED
FOUNDATIONS, GRADE BEAMS, RETAINING WALLS, UTILITIES AND OTHER
EXISTING APPURTENANCES OR AS DIRECTED BY THE ENGINEER.

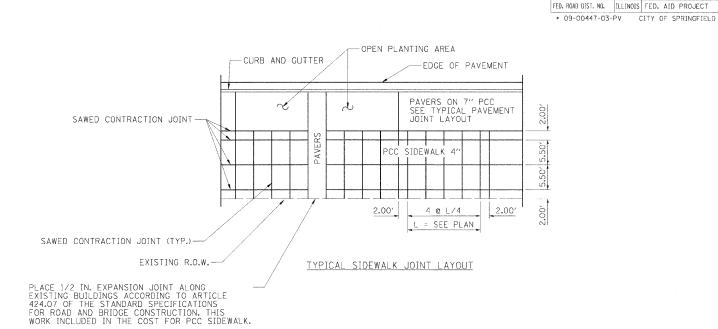

REVISIONS NAME

ILLINOIS DEPARTMENT OF TRANSPORTATION PAVEMENT & SIDEWALK JOINT DETAILS FAU RTE 7982 CAPITOL AVE

SEC NO. 09-00447-03-PV SANGAMON COUNTY, ILLINOIS

SCALE: VERT. HORIZ.

DRAWN BY DAP

CONTRACT NO. 9 3 5 1 8

COUNTY TOTAL SHEETS

SANGAMON

RTE. SECTION

7982